



## OT-LL01 Installation Guide

## **Introducing your Device**

Learn about your OT-LL01's layout, indications, and specifications.

### **1. Inside the Box**

Check your product box for the following items:

- Device
- USB Charging Cable

### **2. OT-LL01 Specifications**

GPS + WIFI + LBS positioning

Real-time location query

Geo-fence alert

Tamper alert

Cover removal alert


Strong magnetic mount

10,000mAh battery

IP65 dust and water resistant

### 3. Specifications

GSM	B5(850MHz)/B2(1900 MHz) B8(900M Hz)/B3(1800MHz)
LTE	B1/B2/B3/B4/B5/B8/B 12/B 13/B 18/ B19/B20/B26/B28/B66
TTFF (open sky)	Avg. Cold start: <40sec; Avg. Hot start: <1sec
Location accuracy	<10m
Dimension	109 X 61 X 30.5mm
Weight	297g
Battery	10000 mAh, 3.7V Li-Polymer battery
Operating Temperature	-20°C to +70°C
Transmit Protocol	TCP

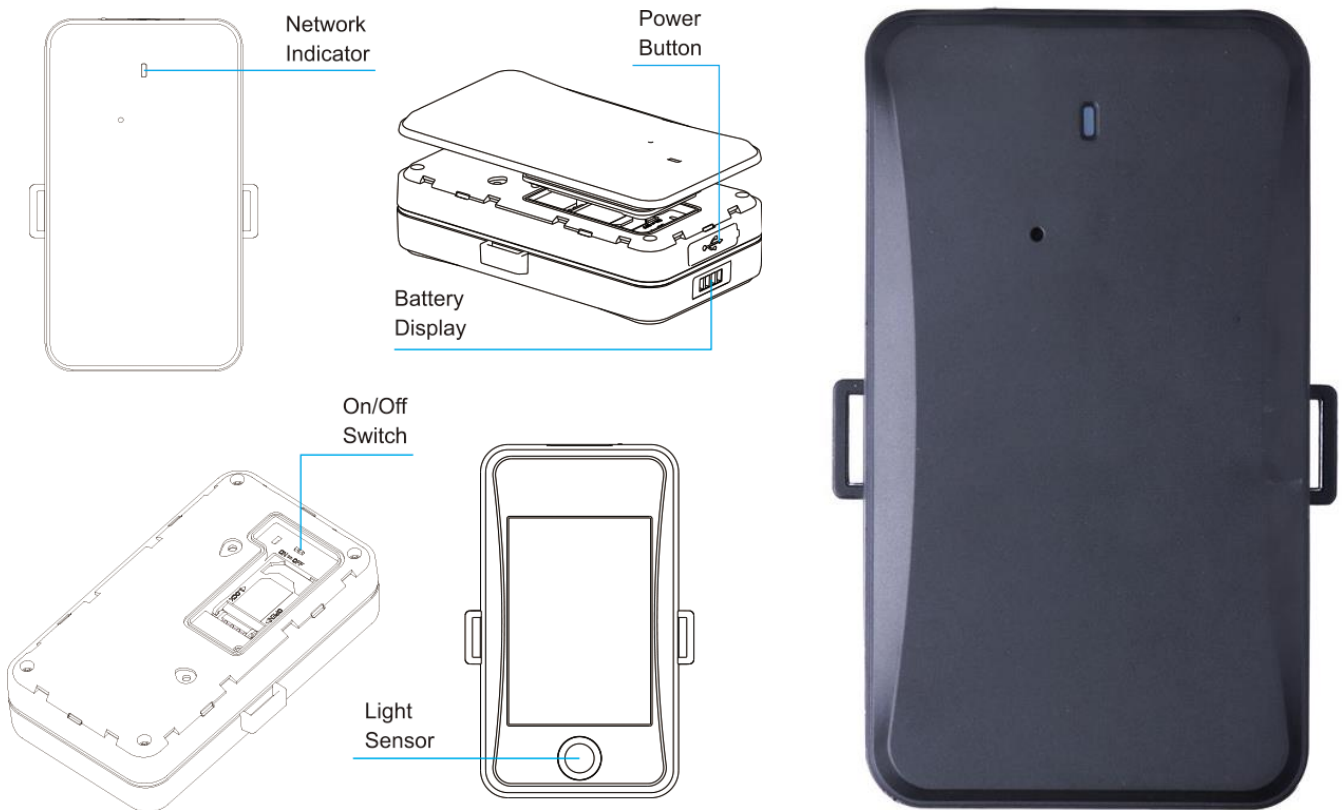

## 4. Getting Started

Your device has the SIM Card installed already and is ready for use. All that needs to be done now is fully charge the device, and then power it on using the on/off switch underneath the cover and pressing the power button underneath the charging port protector.

